





VIEW "A"

(SCALE : 2/1)




VIEW "B"

(SCALE : 1/1)

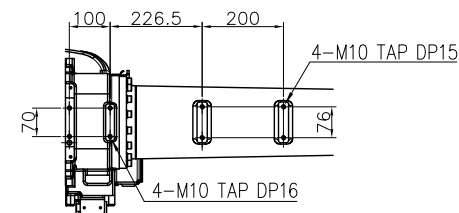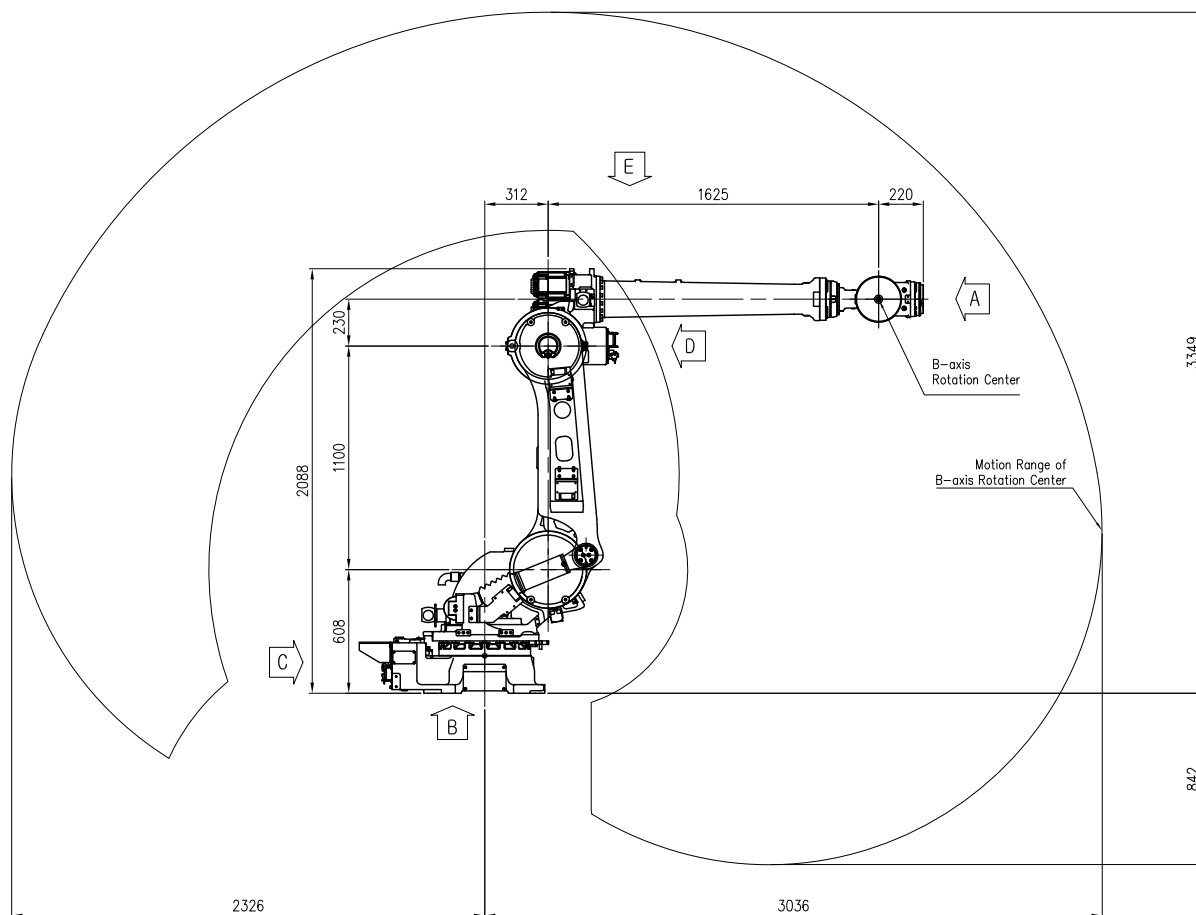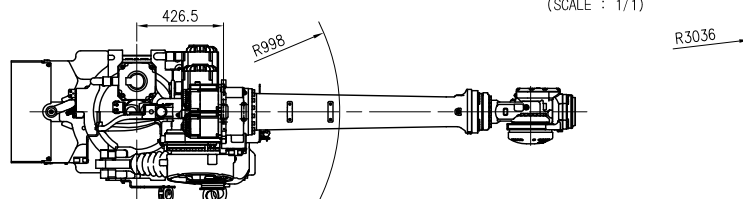



VIEW "E"

(SCALE : 2/1)

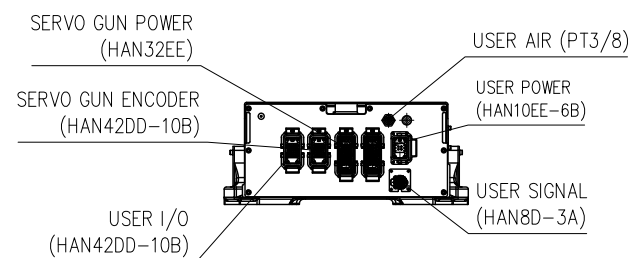

VIEW "C"

(SCALE : 2/1)

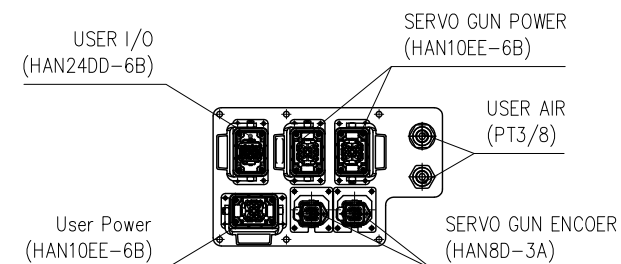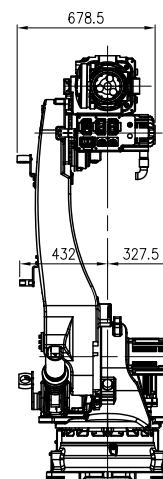

VIEW "D"

(SCALE : 4/1)

BASIC SPECIFICATION OF HS160L. PLEASE, REFER TO THE CATALOGUE

Maximum Operating Range	Arm	S (Swivel)	±180° (±178°: LS Option)
		H (Horizontal)	+155° ~ +10°
		V (Vertical)	+190° ~ -80°
		H/V (Interference)	(+190° ~ -73°: LS Option) +10° ~ +280° (+17° ~ +280°: LS Option)

MODEL	HS160L	issue.1
DATE	2015.04.28	



HYUNDAI HEAVY INDUSTRIES CO.,LTD.
ENGINE & MACHINERY DIVISION

TECHNICAL SPECIFICATION SUBJECT TO
CHANGE WITHOUT NOTICE